



HOW TO SEAL FIBO WALL PANELS
For watertight system, apply Fibo Seal as shown beneath. All cutting surfaces must be sealed, also when drilling holes for pipe penetration. Incorrect installation will void your warranty. Use Fibo Clean and Fibo Wipes to remove excessive sealant. Film from cleaning accessories shall be removed immediately from panel surface.

HVORDAN FUGE FIBO VEGGPANEL
For vanntett system, påfør Fibo Seal som vist under. Alle kuttflater skal forsegles også ved hulltakning til regnløsnemnting. Ved mangelfull monteringsbortfølger garanti. Bruk Fibo Clean og Fibo Wipes for å fjjerne overflødig fugemasse. Film fra rengjøringsbiter skal fjernes umiddelbart fra panelene.

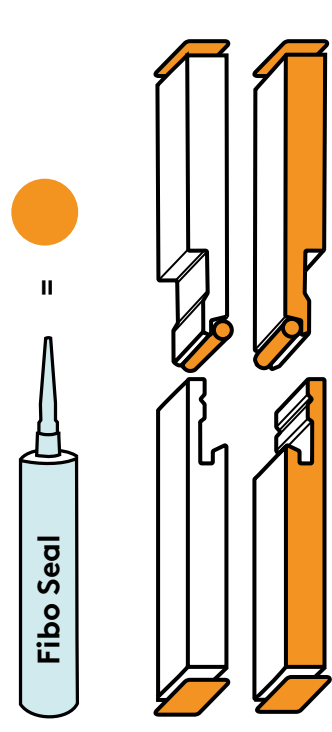


1 BACKWALL OPTIONS * VELG RIKTIG BAKVEGG

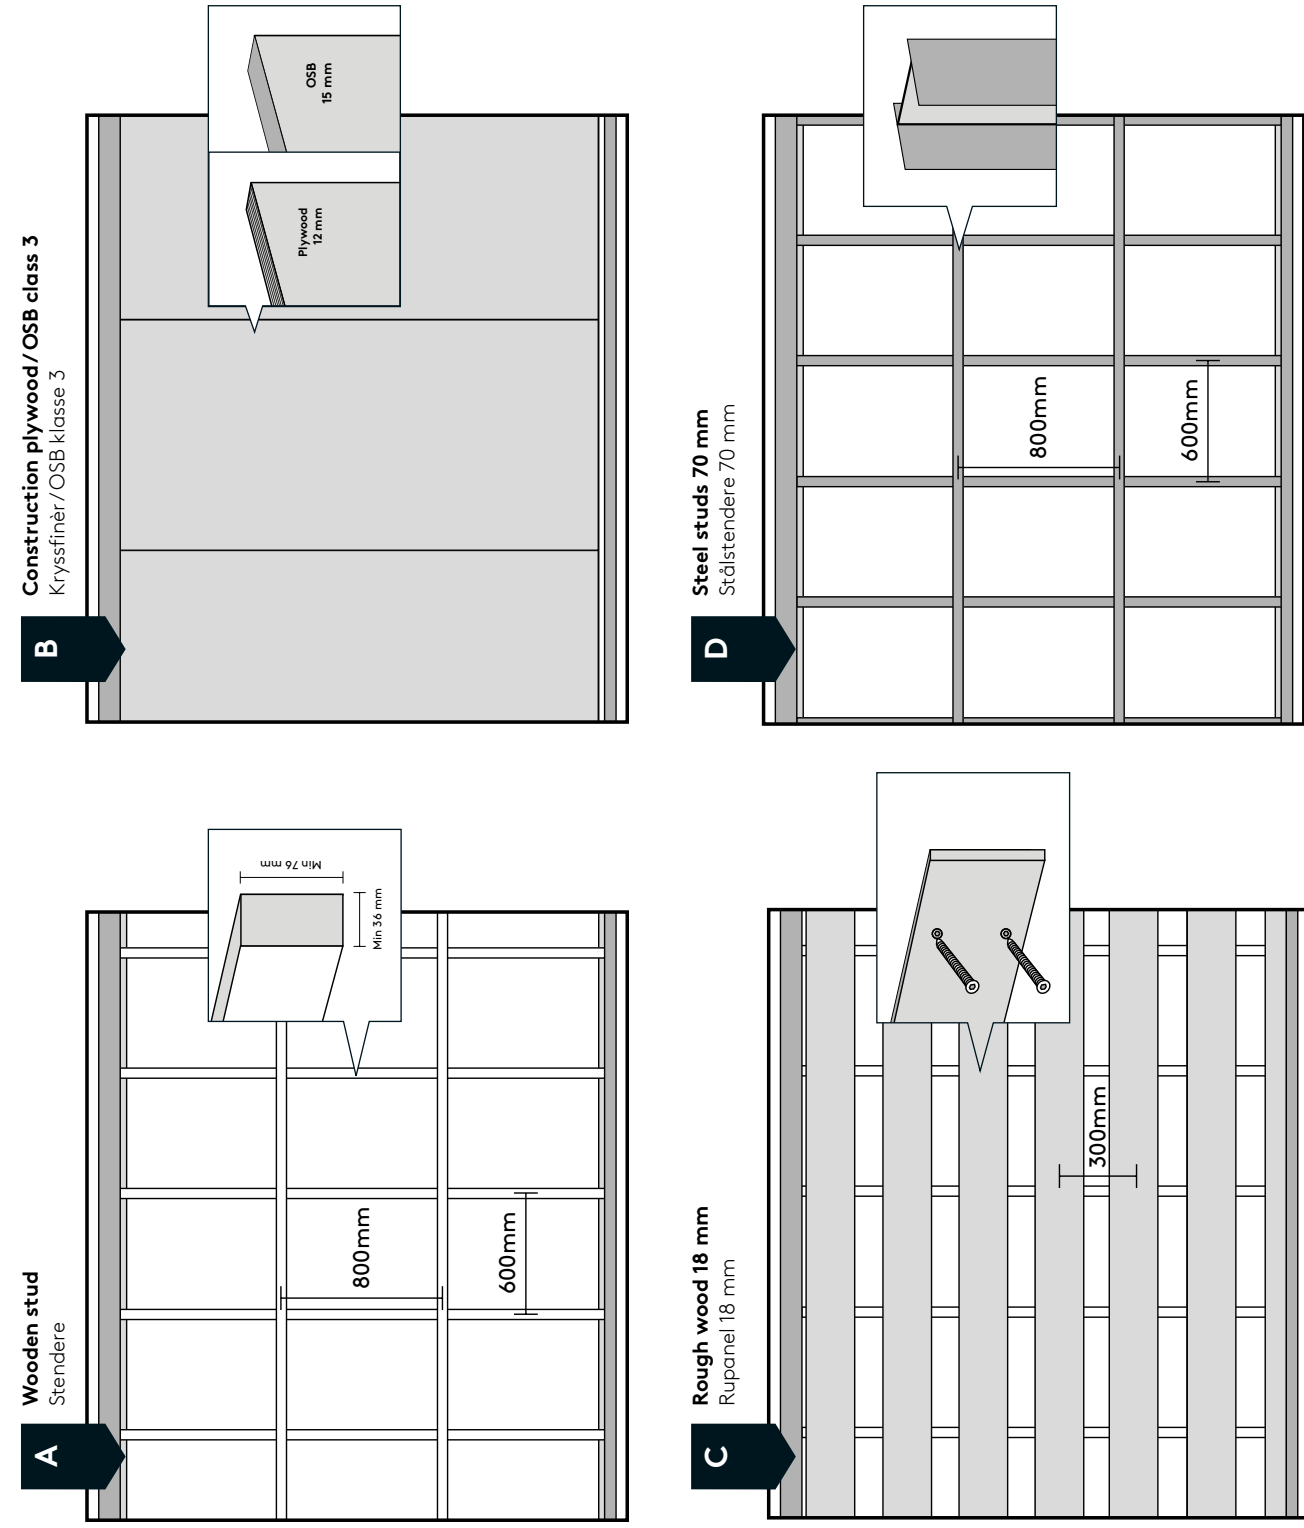

* For alternative backwall in selected markets, visit fibosystem.com


2 CHOOSE PANEL FIXING VELG FESTE METODE FOR PANEL

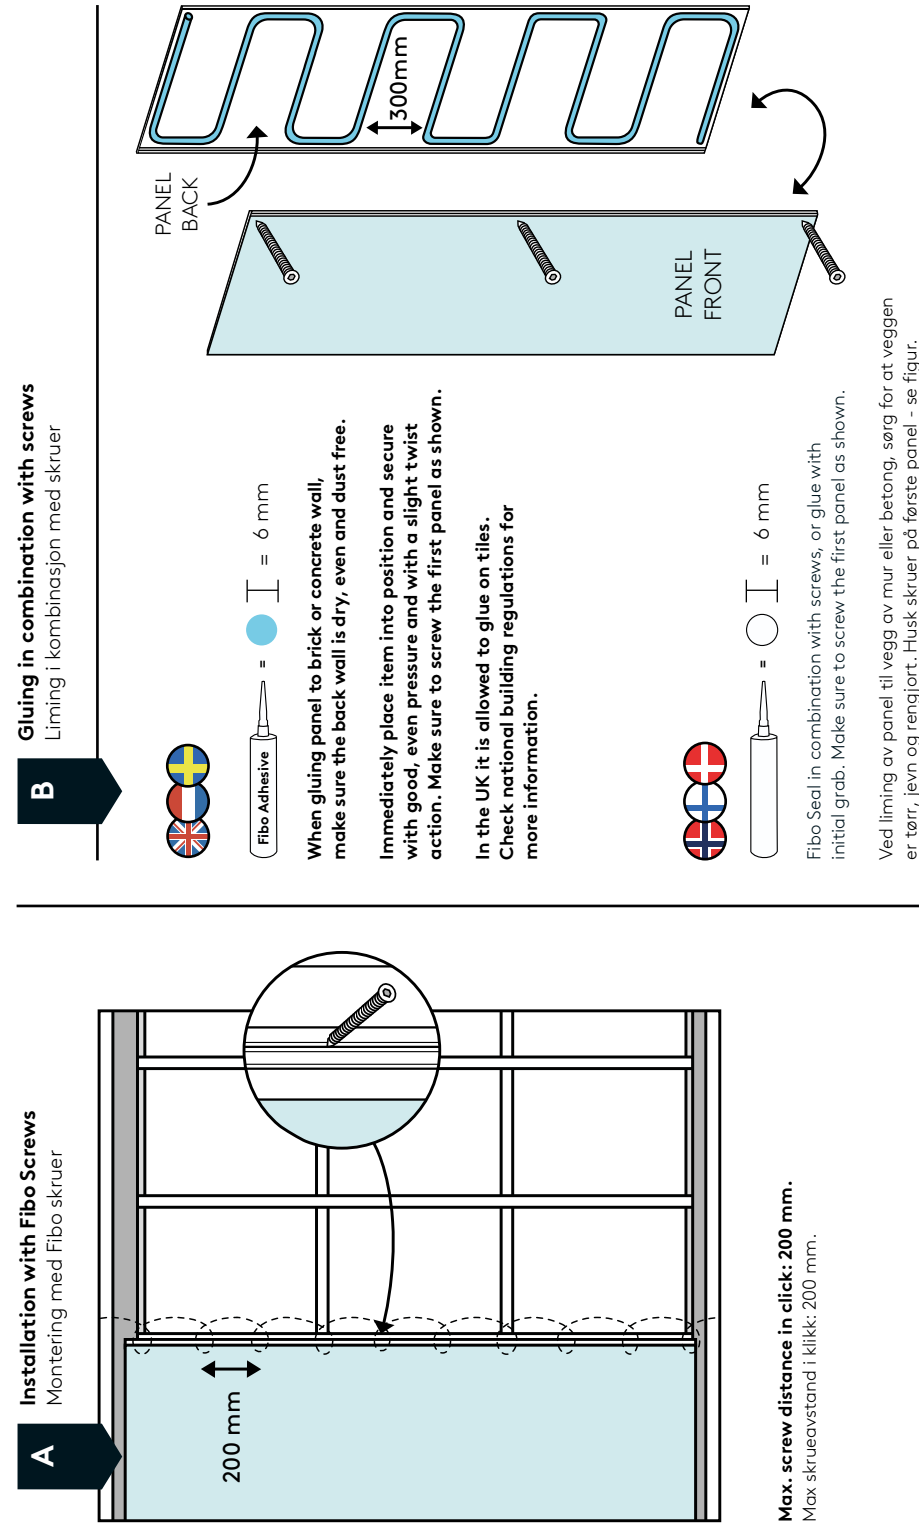

3 CHOOSE SOLUTION FOR APERTURES FOR PIPES VELG LØSNING FOR RØR/LENNOMFØRING

Cutting surfaces must be sealed when drilling holes for pipe penetration. For complete installation guidance, follow the wall box producers' instructions. The ones illustrated are ETAG 002 approved systems. Approval for PP- and copper pipes is documented through SINTEF Technical Approval Z28.

Kuttflater skal forsegles ved hulltakning til regnløsnemnting. For fullstendig monteringsanvisning se ETAG 002 godkjente løsninger. Følg veggboksprodusentenes anvisninger. Godkjenninger for PP- og kobberrør er dokumentert i SINTEF Teknisk Godkjenning Z28.

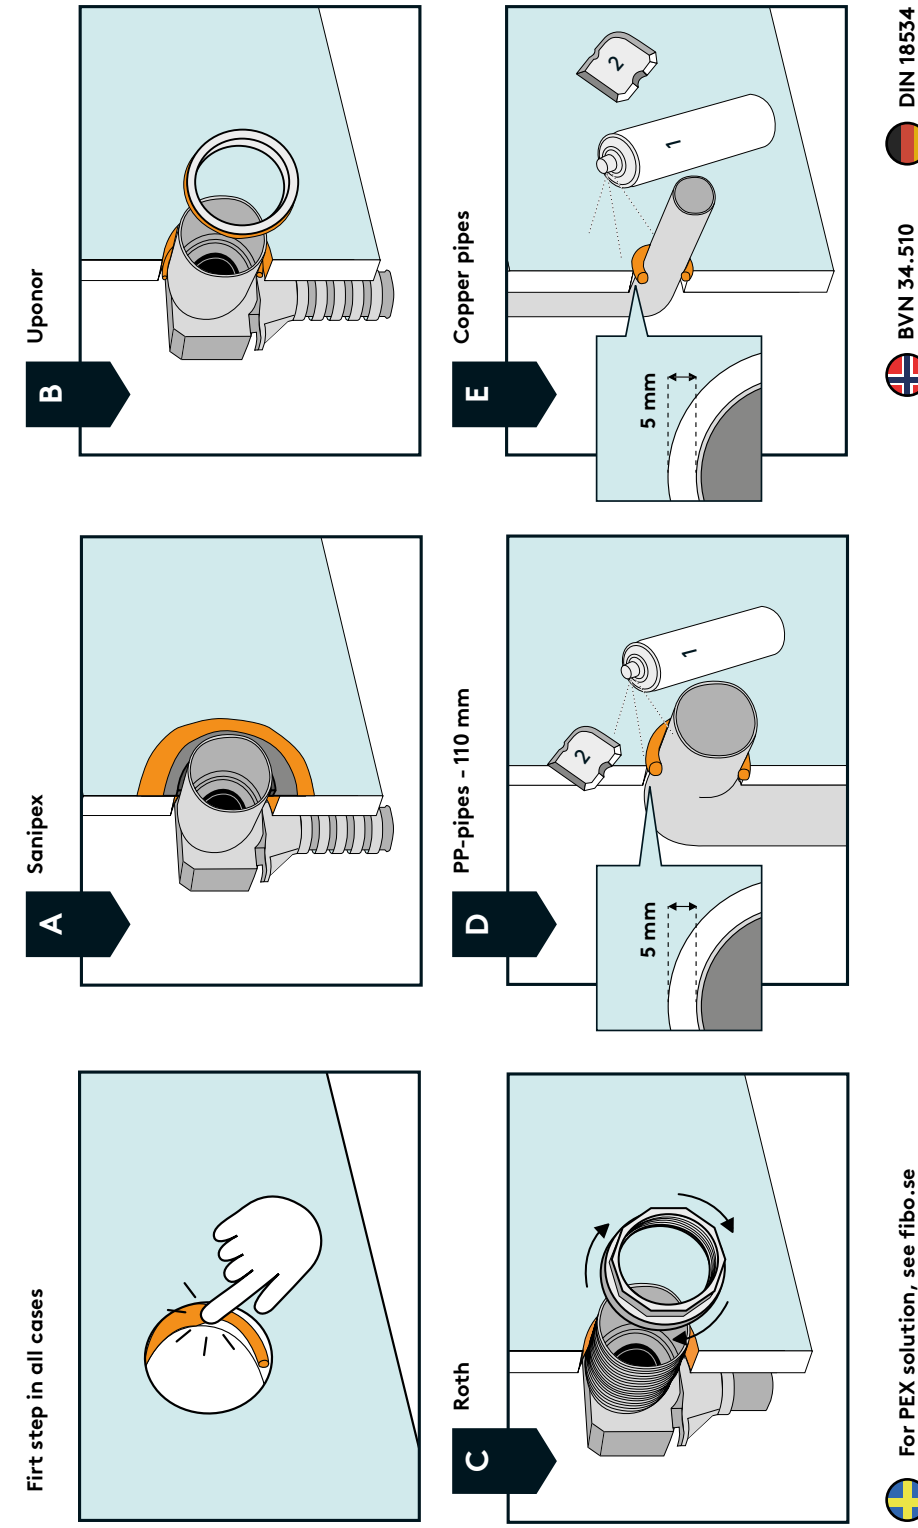


For PEX solution, see fibo.se

BVN 34.310




4 STACKING PROFILE | EXTERNAL CORNER PROFILE | SEALING FINISH * SKJØTEPROFIL | UTVENDIG HJØRNEPROFIL | AVSLUTNING MOT TAK

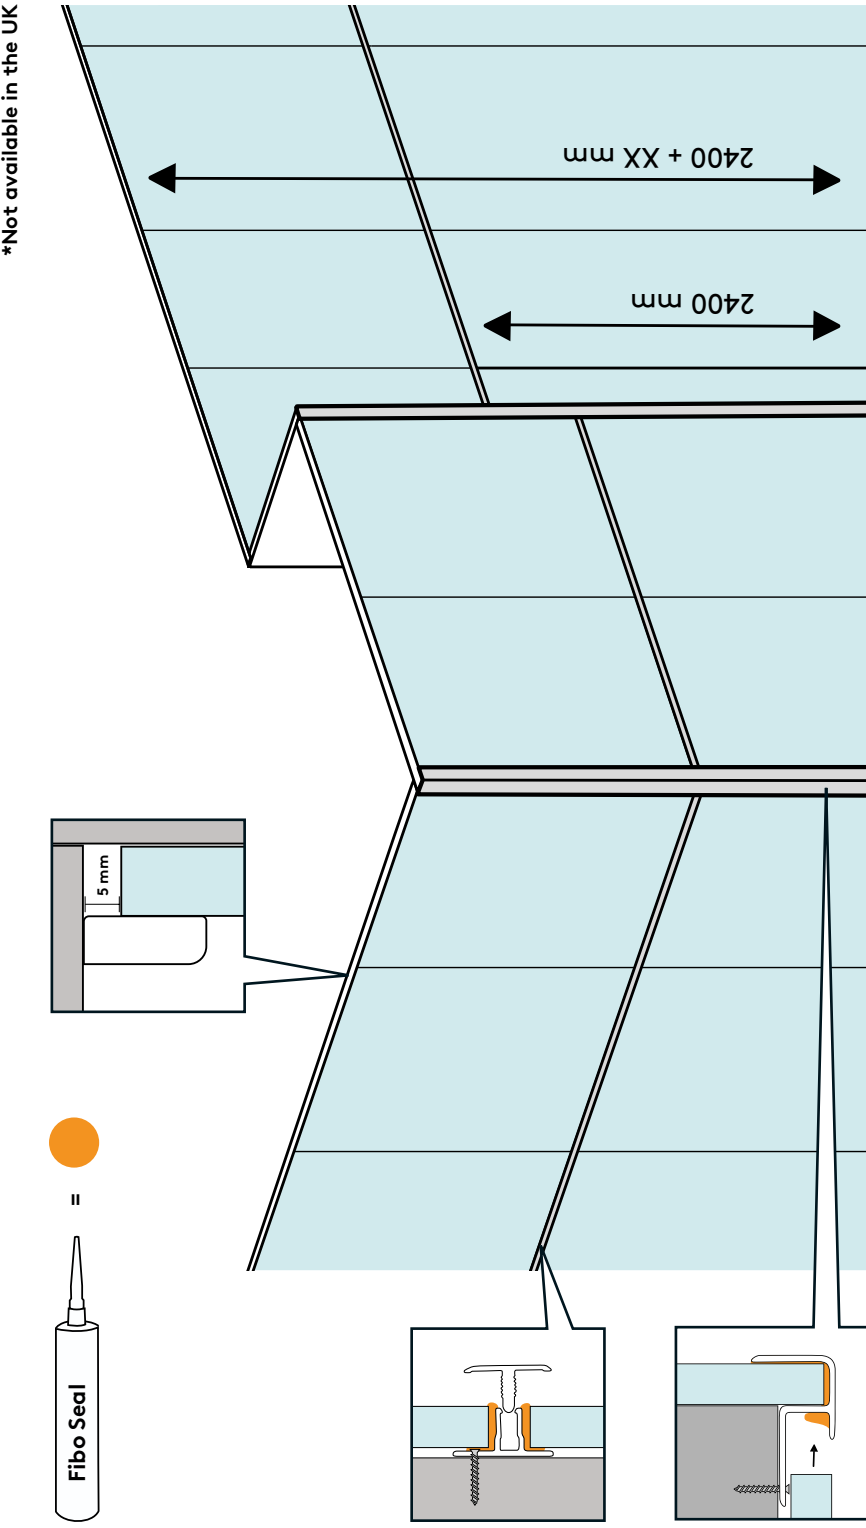

*Not available in the UK

5 CHOOSE TRANSITION TO FLOOR MEMBRANE AVSLUTNING MOT GULVMEMBRAN

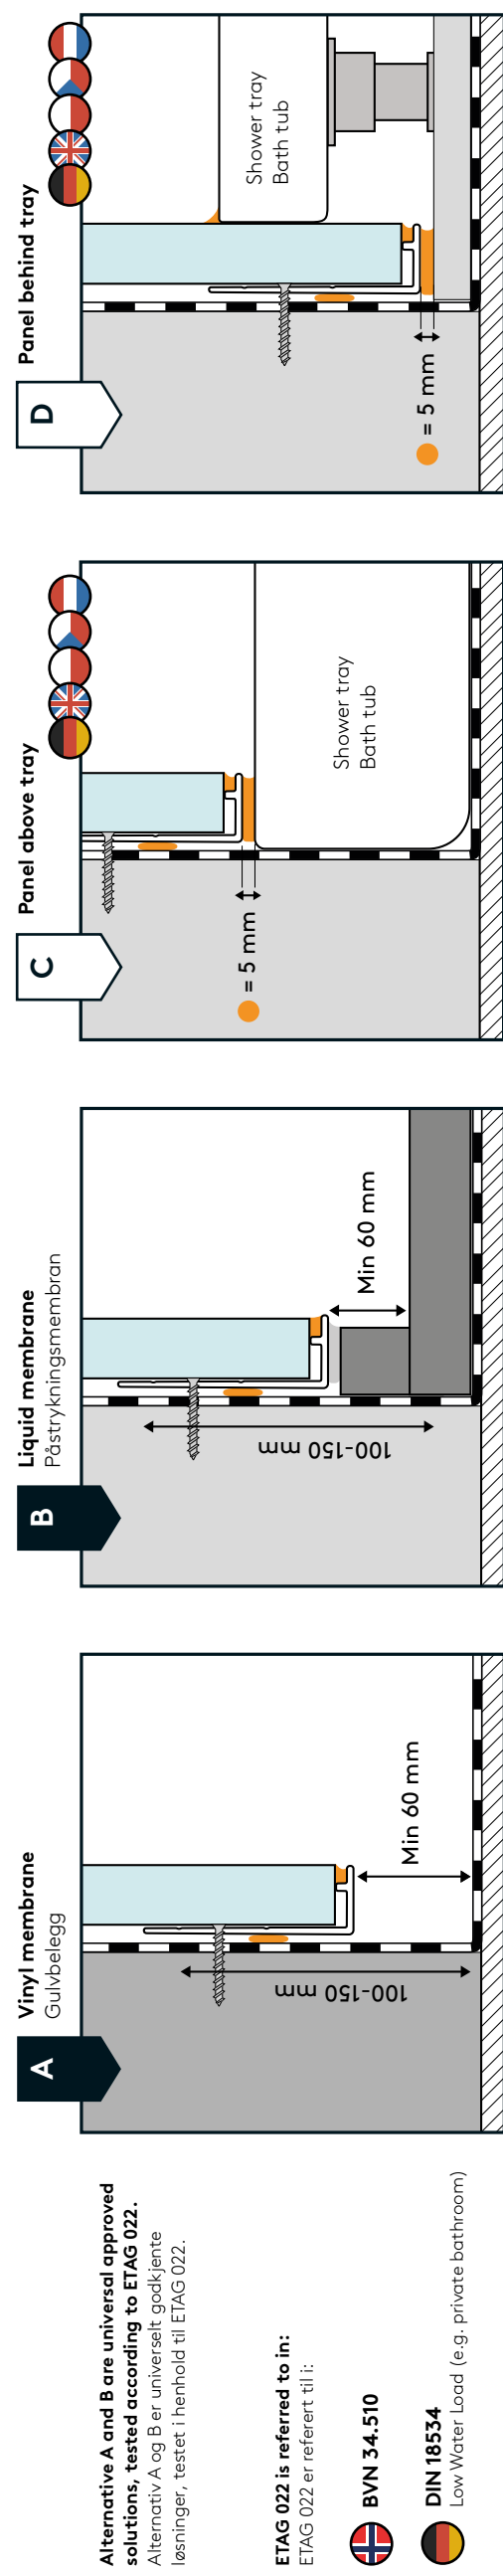

Alternative A and B can achieve approved solutions, tested according to ETAG 002.
Alternativ A og B er universelt godkjente løsninger, testet i henhold til ETAG 002.

ETAG 002 is referred to in:
ETAG 002 er referert til i:



BVN 34.310




DIN 18534

Low Water Load (e.g. private bathroom)

6 CHOOSE PREFERRED CORNER PROFILE A, B OR C VELG HJØRNEPROFIL A, B ELLER C

A 2-PART INTERNAL CORNER PROFILE* 2-DELT INNVEDIG HJØRNEPROFIL

* Not available in the UK

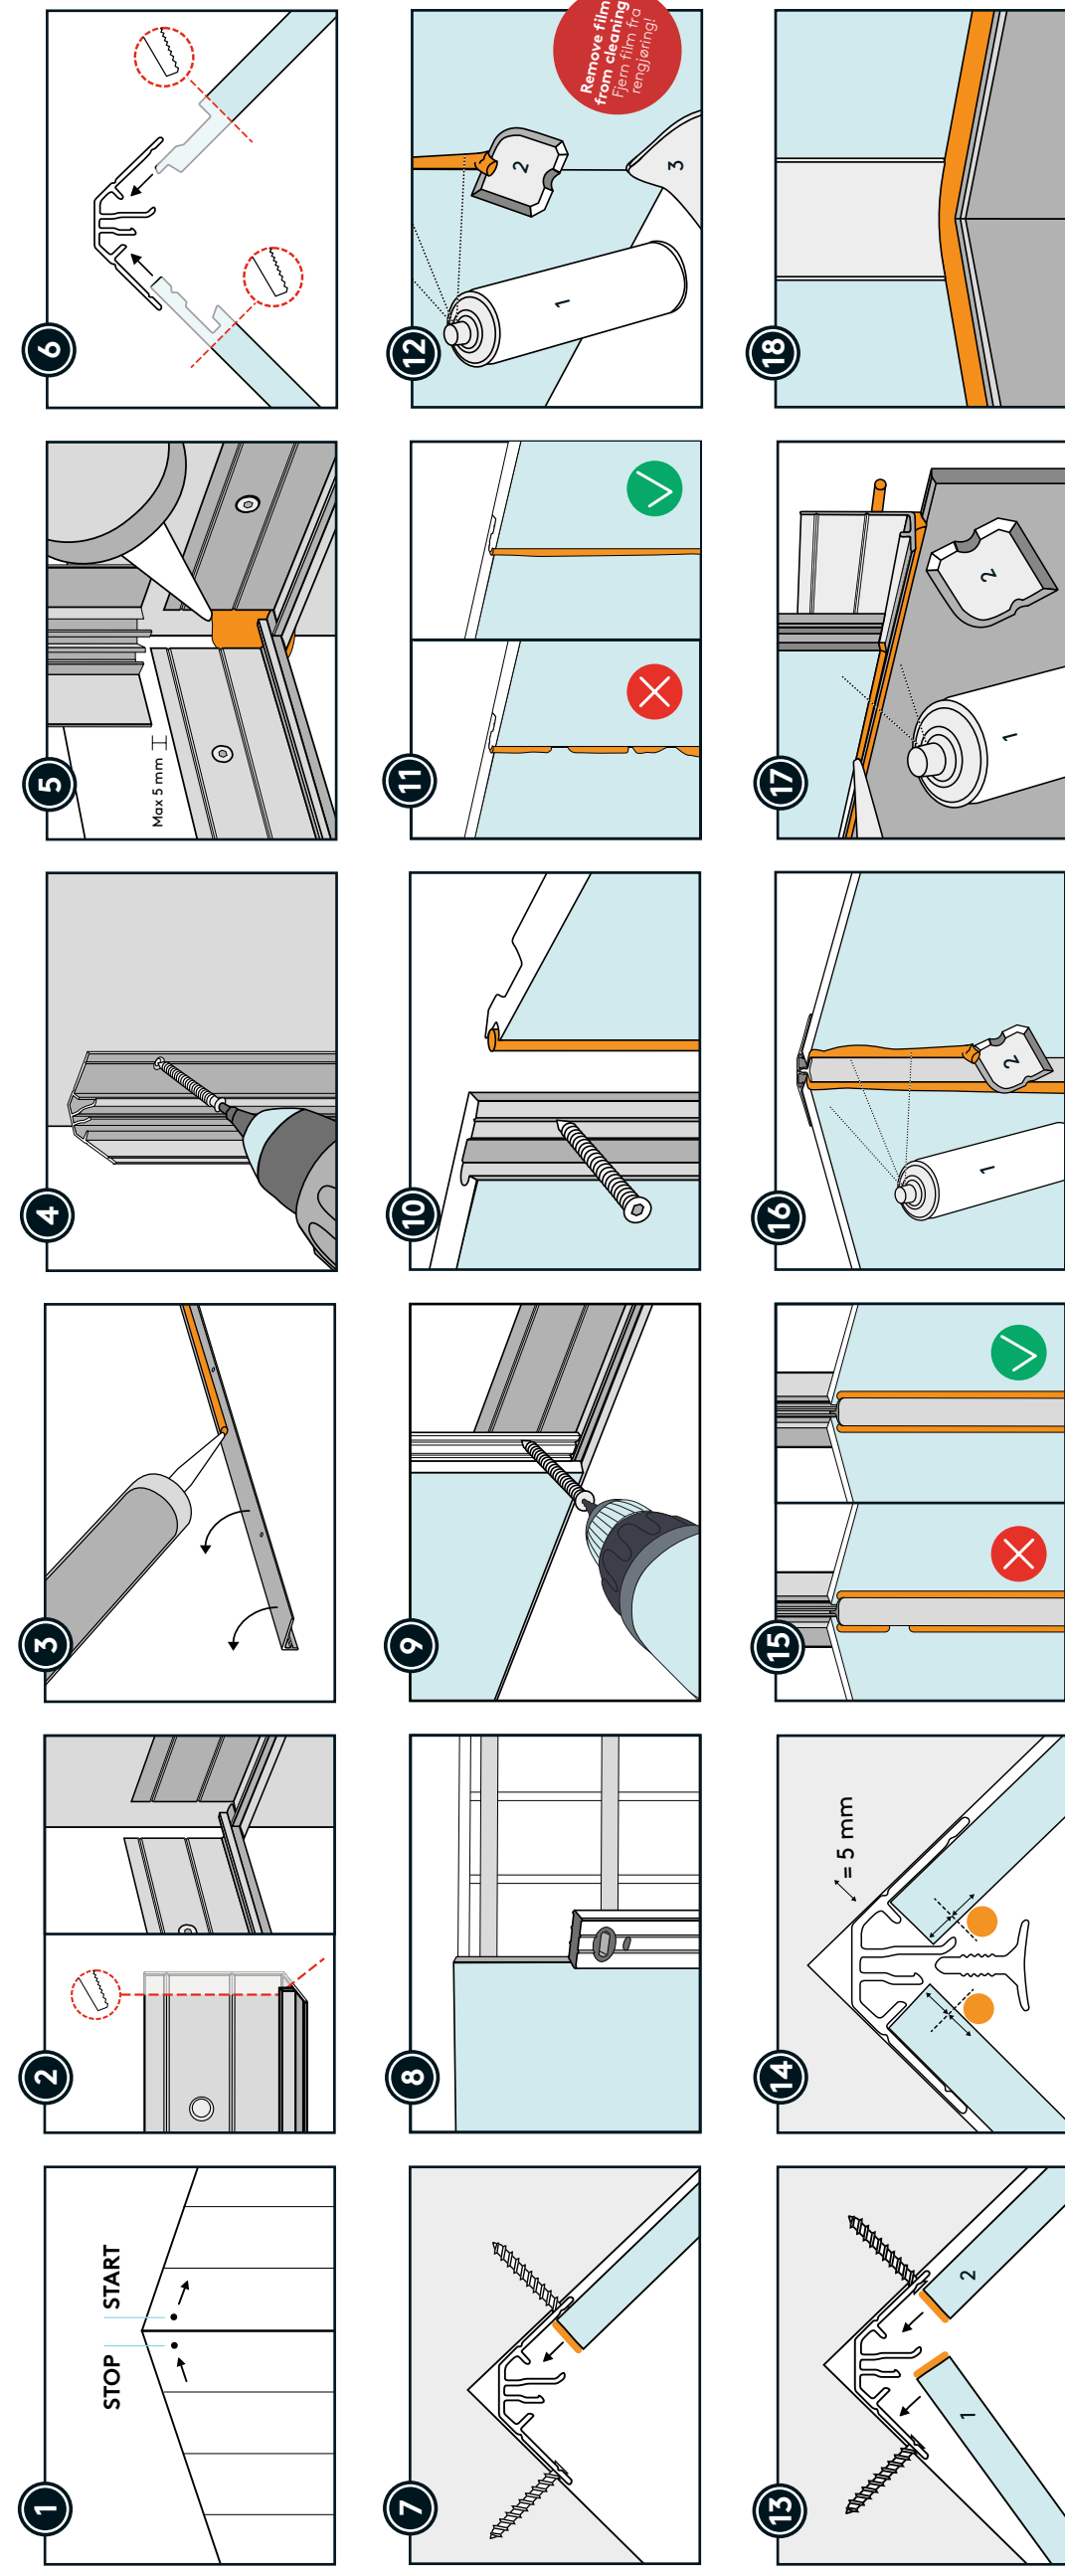


B HIDDEN INTERNAL CORNER PROFILE SKJULT HJØRNEPROFIL

* Not available in the UK




Profile Tape

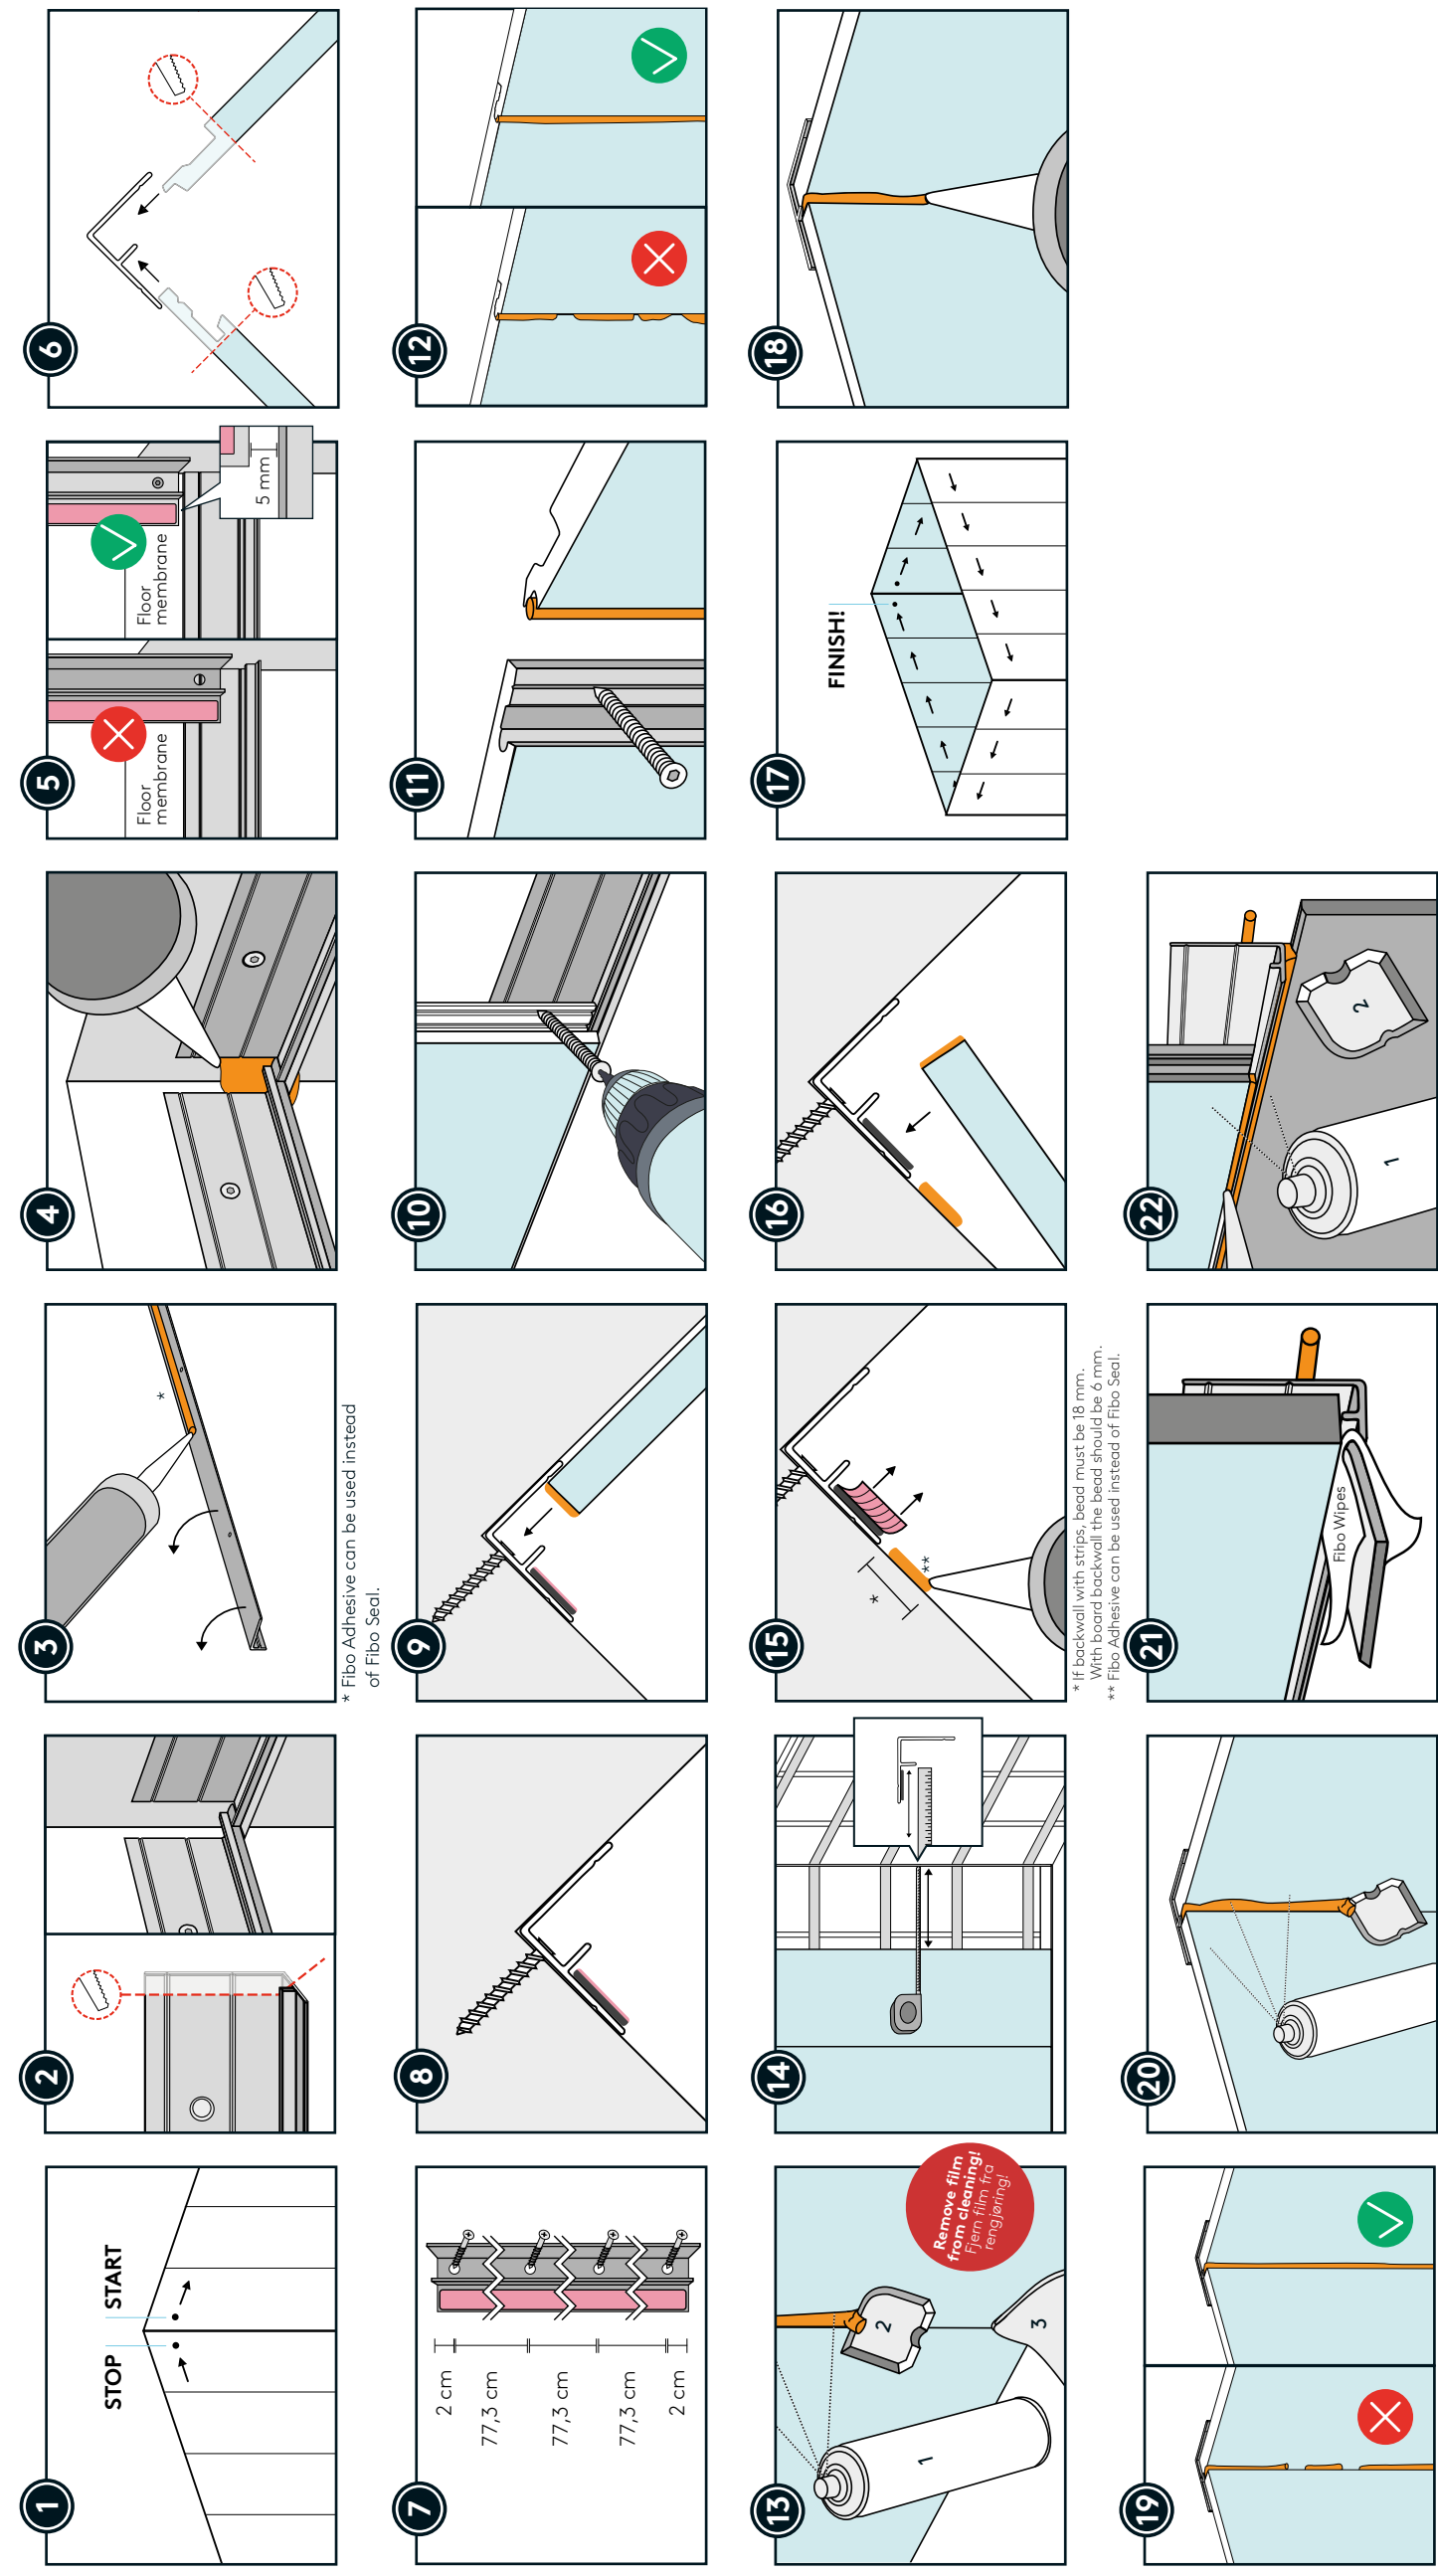

C STANDARD INTERNAL CORNER PROFILE STANDARD INNVEDIG HJØRNEPROFIL

* Not available in the UK

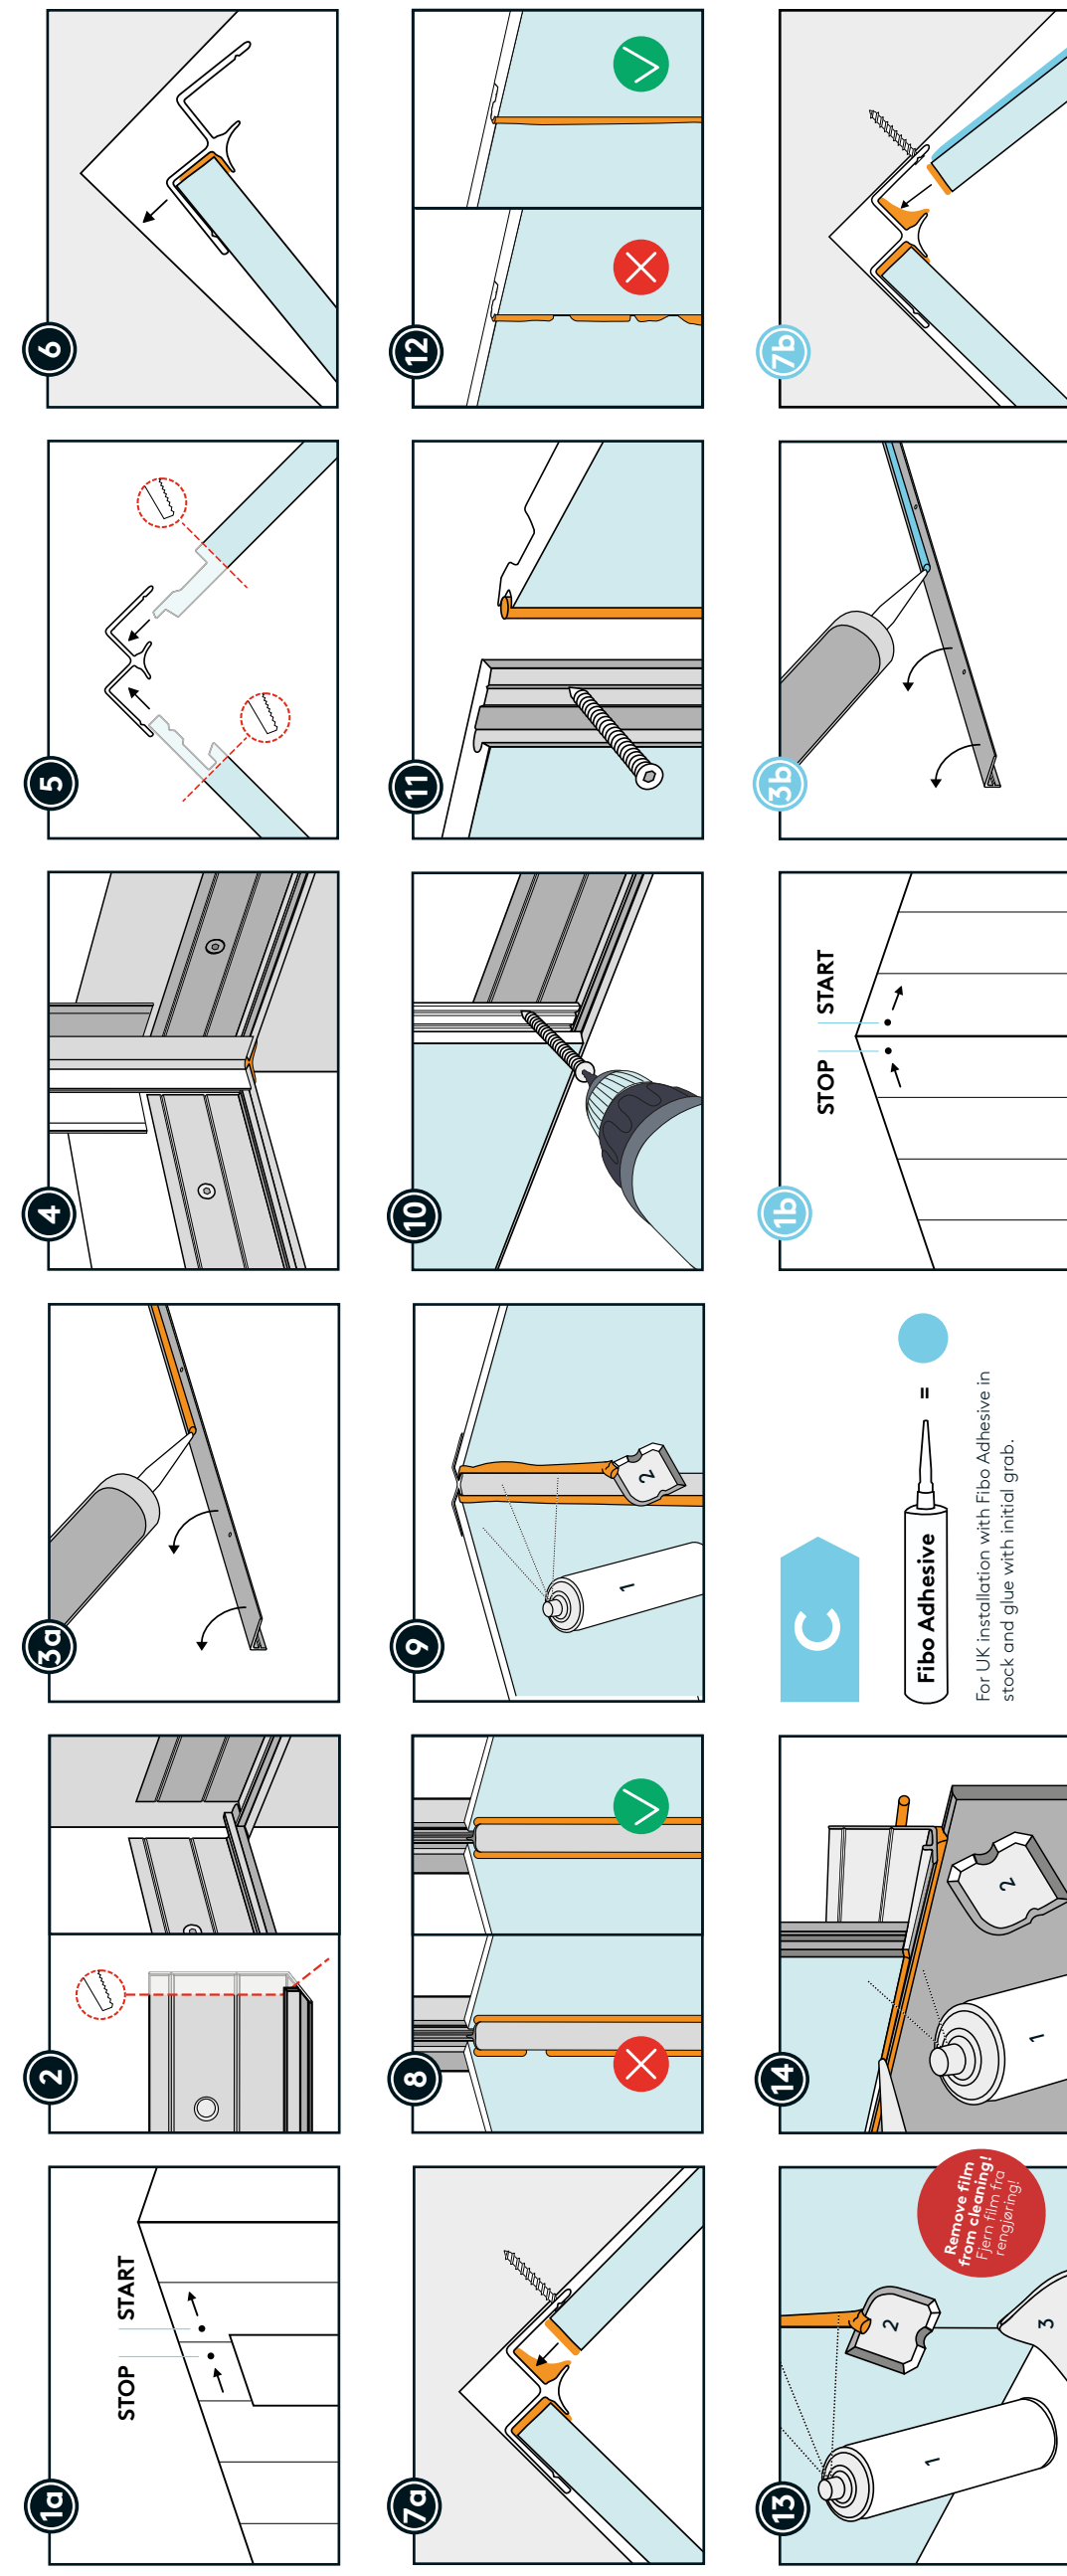

Fibo Adhesive

For UK, insulation with Fibo Adhesive in stock and glue with initial grab.